


CR9V/P

Lithium Manganese
Dioxide(Li-MnO₂)Batteries

Specifications





Nominal Voltage	9V
Nominal Capacity ^{*1}	1200mAh
Max. Discharge Current ^{*2}	120mA
Max. Pulse Current ^{*3}	400mA
Standard Discharge Current	7.5mA
Operating Temperature ^{*4}	-40~+60°C
Approx. Weight	39.0g
UL Component Recognition	MH10330

Dimensions (mm)

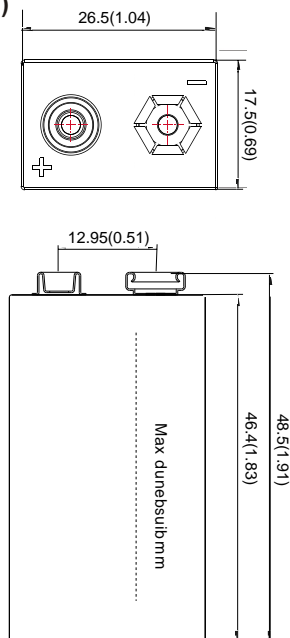

- *1 Nominal capacity is determined at an end voltage of 4.0V when the battery is allowed to discharge at a standard current level at +23°C.
- *2 Current value is determined to be the level at which 50% of the nominal capacity is obtained with an end voltage of 4.0V at +23°C.
- *3 Current value for obtaining 4.0V cell voltage when pulse is applied for 3s on and 27s off at 50% discharge depth(50% of the nominal capacity) at +23°C.
- *4 Consult EVE when using batteries at temperatures exceeding the -20°C To +40°C range.

Discharge performance (Typical values for cells stored for one year or less, at 23 °C)

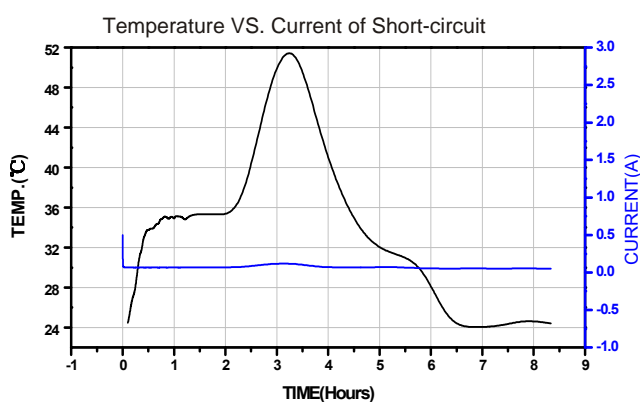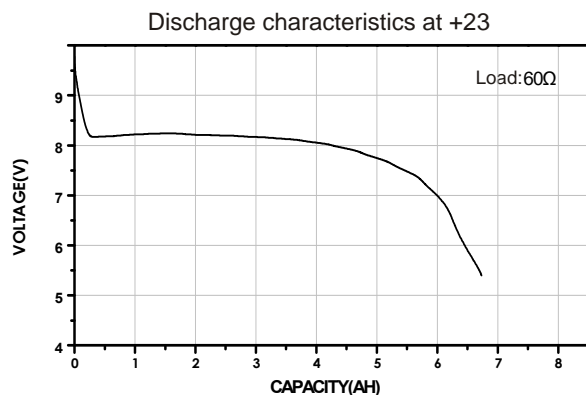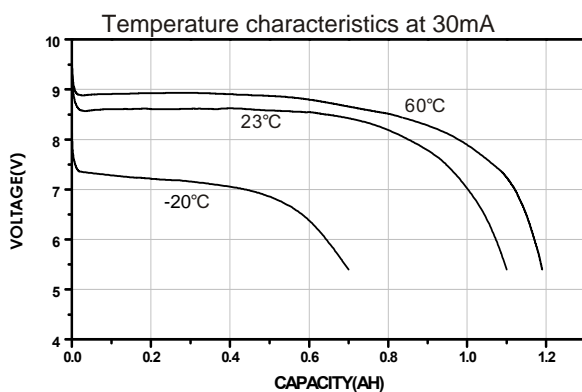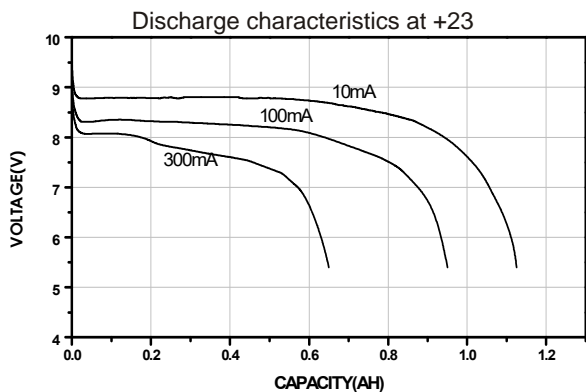

- Cell and battery designs/specifications are subject to modification without notice, contact EVE for the latest information.
- Any representations in this data sheet concerning performance are for informational purpose only and are not construed as warranties, either expressed or implied, of future performance.

EVE ENERGY CO., LTD.

Address: NO.38, Hui Feng 7th Road, Zhongkai Hi-Tech Zone, HuiZhou, Guangdong, China

Operator: (86-752)260 6966 Direct: (86-752)260 5822

Fax: (86-752)260 6033 P.C.516006