



Specification of AC 0812A

Input Voltage	115 / 230Vac [AUTO SW.]
Input Frequency	47 ~ 63Hz
Max. In-rush Current	Cold start , 20A for 115Vac , 40A for 230Vac
Input Current	3.1A Max for 115Vac 1.5A Max for 230Vac
Output Voltage (can specific by order)	14.6Vdc \pm 0.2V (Absorption Charge) 13.7Vdc \pm 0.2V (Float Charge)
Start Point of Floating (can specific by order)	1.2A \pm 0.2A
Max. Charging Current	8A \pm 0.2A
Ripple / Noise	200mVp-p
FAN Control	Fan on fast speed (Bulk / Absorption Charge) Fan on slow speed (Float Charge)
LED Indication	LED1 : Red \rightarrow Power on LED2 : Orange \rightarrow Charging Green \rightarrow Full charged
Mains Lead	1.8M EURO Plug Mains
DC Cable	SPT2 2C 16AWG at 1.2M Mount clips
Dimension	180 x 88 x 47 mm
G.W.	0.8 Kgs

Charge curve :

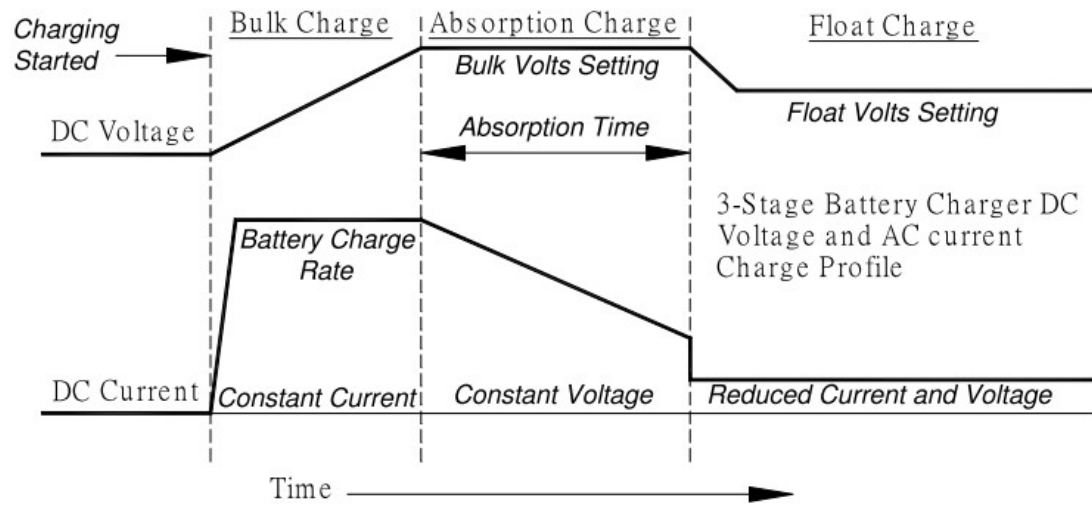


Body View

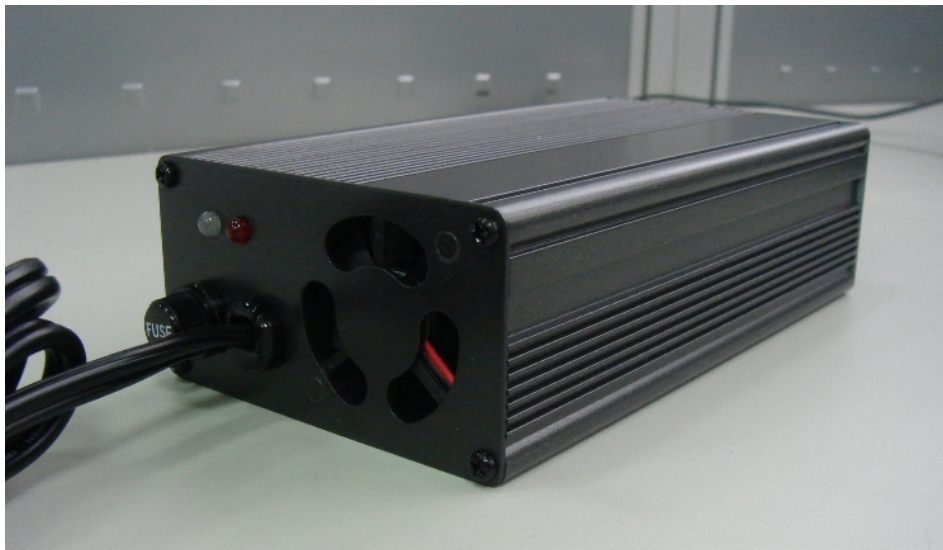


Rear Panel



Case Draw :

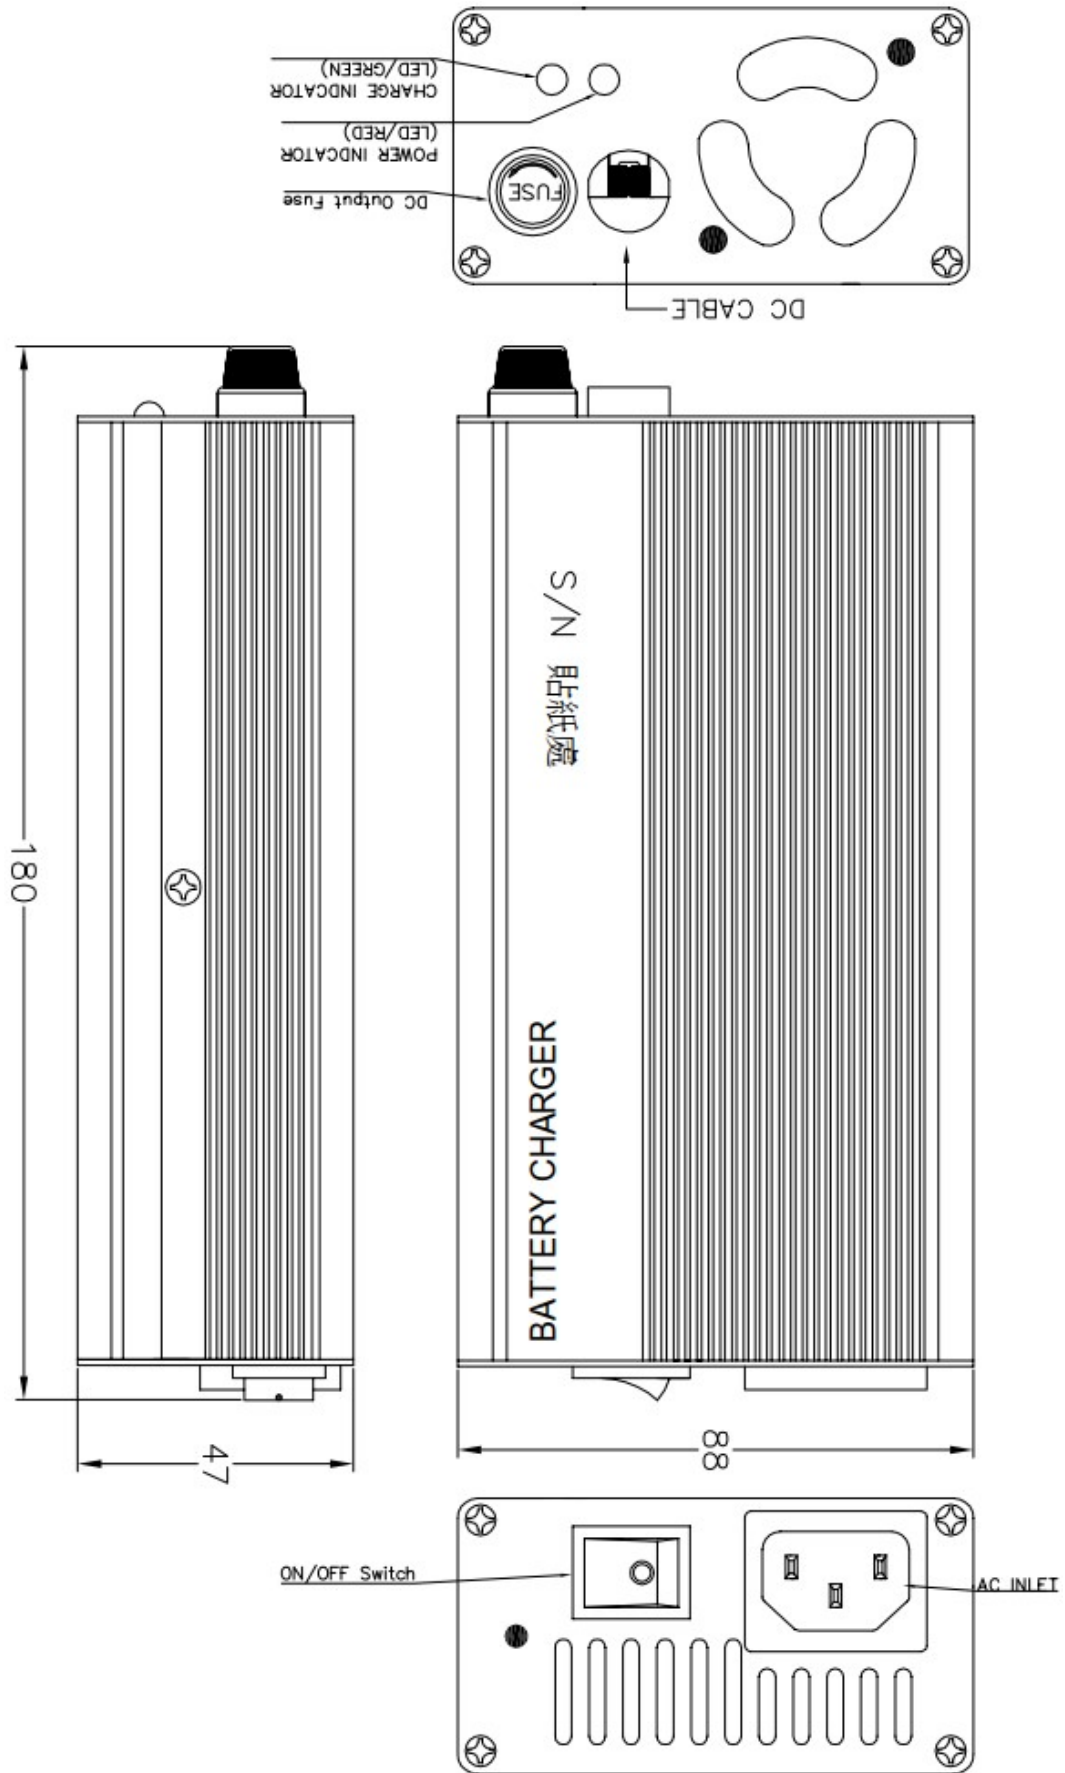

DC Cord :

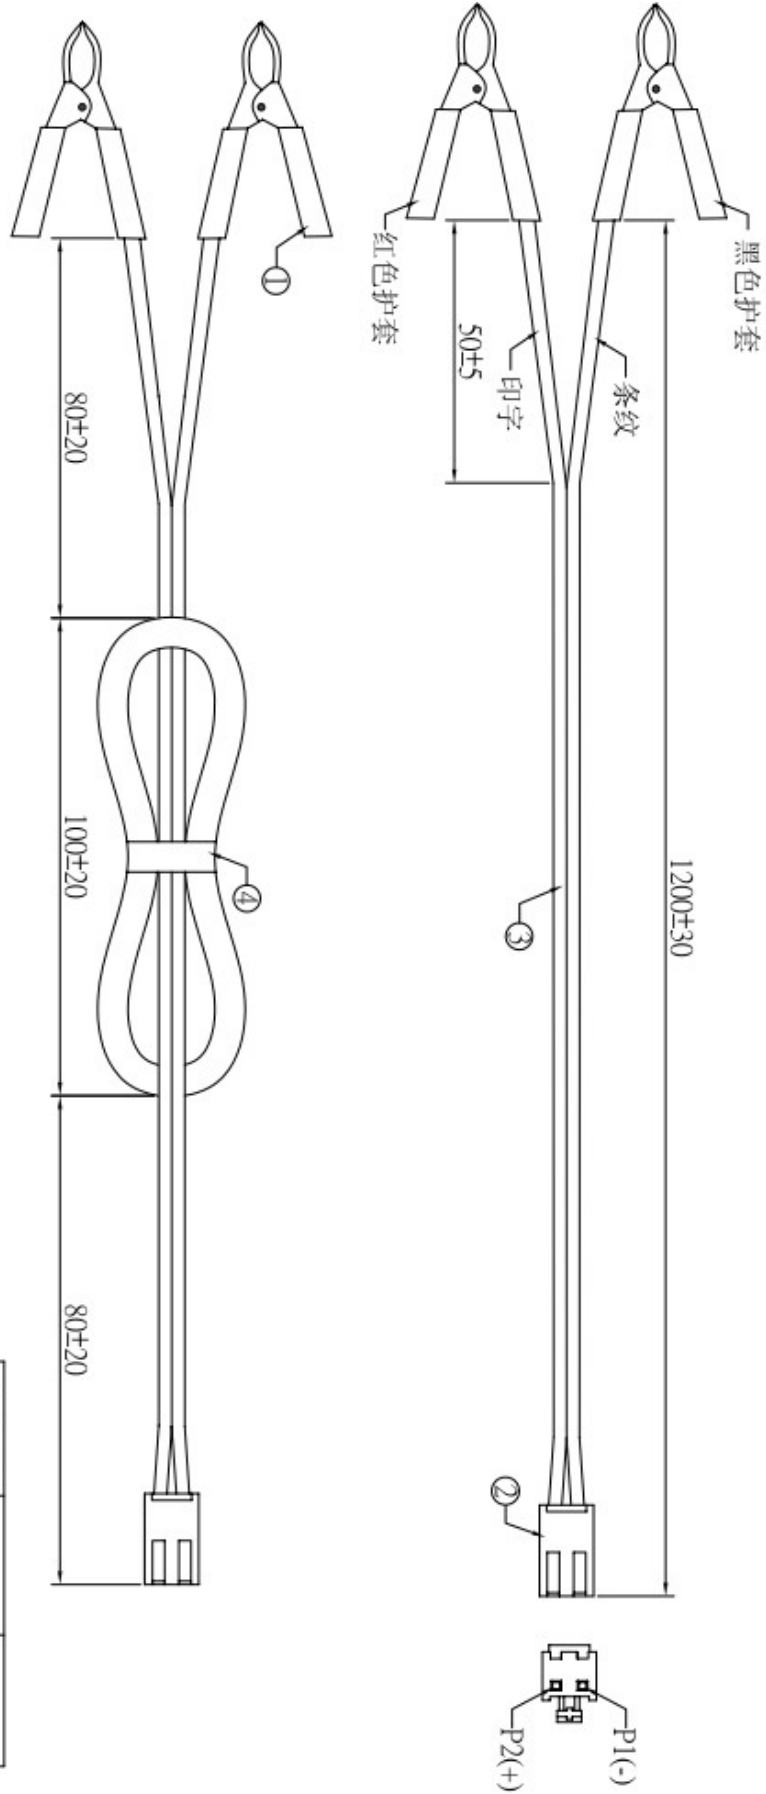

线材	电瓶夹 Housing	黑色护套 P1(-)	红色护套 P2(+)
----	-------------	------------	------------

Mains Lead :

<p>品名 H05 0.75mm²/3G SL-3+SL-9</p>	<p>ROHS</p>	<p>021</p>
<p>SPECIFICATION :</p> <p>(1) LENGTH : 1.83M</p> <p>(2) COLOR : BLACK</p> <p>(3) PLUG : SL-3 (A)10 (V)250 APPROVAL:EUROPEAN</p> <p>(4) CONNECTOR: SL-9(A)16 (V)250 APPROVAL: EUROPEAN</p> <p>(3) CABLE : H05 0.75mm²/3G APPROVAL: EUROPEAN</p>		
<p>升林有限公司</p> <p>SHEE LINE CO., LTD.</p>		<p>日期</p> <p>Month Day Year</p> <p>02 / 14 / 2008</p>
<p>承認</p> <p>Approved</p>		<p>客戶</p> <p>Name</p>
<p>機種</p> <p>客戶圖號</p>		<p>圖號</p> <p>NO.</p>