


### Features & Benefits

- Suitable for Camera, Light, etc. because of super high rate discharge.
- Easy to get high rate discharge because manganese dioxide is used in positive electrode and spiral design is adopted at the polar plate.
- Available in consumer market


### Dimensions

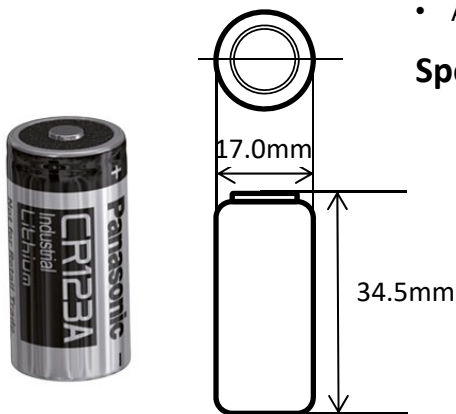


### Specifications

Part number		CR123A
Nominal voltage		3V
Nominal capacity		1,550mAh
Continuous drain		20mA
Dimensions	Diameter (Max.)	17.0mm
	Height (Max.)	34.5mm
Weight		Approx. 16.0g
Operating temperature		-40°C to +70°C


### Discharging Characteristics

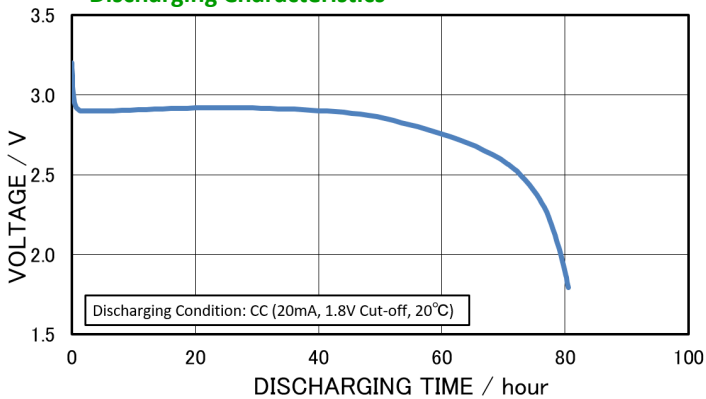

### Discharging Characteristics by Temperature

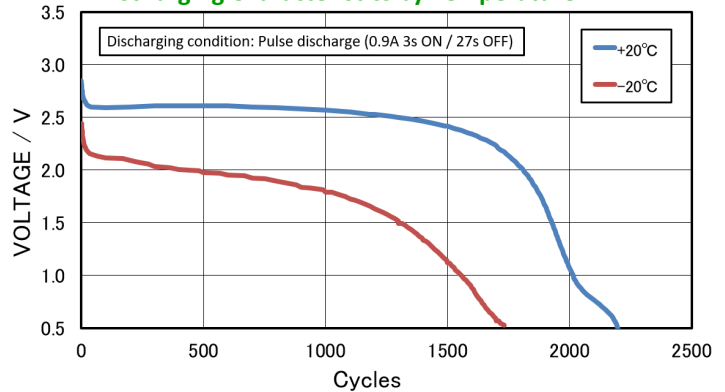

### Continuous Discharging Characteristics

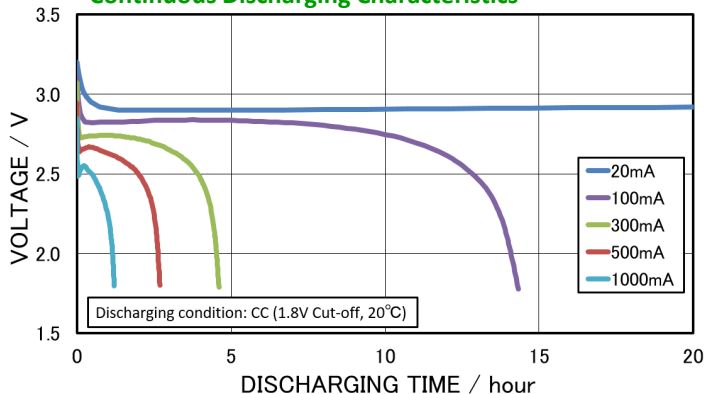

### Applications

Lights, Security devices (electric door locks, Fire alarms), automotive electric components (eCall), Medical Devices(AEDs), etc.

This data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty. As of December, 2019. The contents of this product information are subject to change without notice.

Please visit our website at:

Panasonic Corporation

<https://eu.industrial.panasonic.com/products/batteries-energy-products/primary-batteries/lithium-batteries>

