


BR-2/3AG

BR Cylindrical-type Lithium Battery




Features & Benefits

- Long-term operating performance
- Suitable for Power supplies for products such as that demand long-term reliability

Applications

Commercial equipment (communication/measurement devices), meters (gas, water, electricity, hot water), memory backup (large FA equipment), automotive electronic components (security alarms), etc.

Discharge temperature characteristics

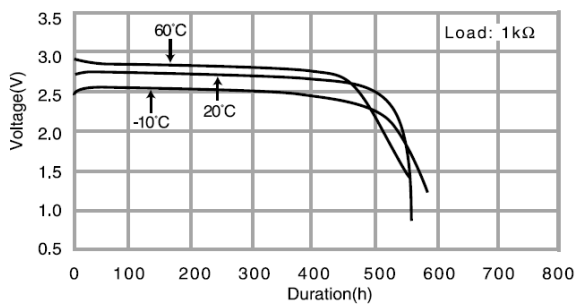

Specifications

Nominal voltage	3V	
Nominal capacity	1,450mAh	
Continuous drain	2.5mA	
Dimensions*1	Diameter(Max.)	17.0mm
	Height(Max.)	33.5mm
Weight*1	Approx. 13.0g	
Operating temperature	-40°C ~ +85°C	

*1 Without tabs.

Terminal types

Please see the documents for the terminal and lead wire settings.

- [Line up of tab terminal types\(by shape\)](#)
- [Line up of tab terminal types\(by product number\)](#)

Operating voltage vs. Discharge current (voltage at 50% discharge depth)

